

One Tough PUPI™

1421 2nd Avenue NW, Stewartville, MN 55976  
 ph 800.533.1680 fax 507.533.4784  
 pupisales@geotekinc.com




Full product catalog and product drawings are available online: [www.pupicrossarms.com](http://www.pupicrossarms.com).  
 GEOTEK is dedicated to continuous improvement, and reserves the right to change design specifications without notice.

# PUPI® POLE TOP EQUIPMENT MOUNTS

The PUPI® Pole Top Equipment Mount is used to mount antennas, receivers, transmitters and other AMR/AMI telecommunications equipment above the tops of utility poles. The sturdy fiberglass assembly is completely non-conductive and contains an internal conduit to protect wires and cables. The profile is a slim 2" x 4", but it has been tested to support typical AMR/AMI telecommunications equipment when subjected to the equivalent of hurricane-force wind loads.

Weighing just 24 pounds, the PUPI Pole Top Equipment Mount is lightweight and simple to install. Pole-mounting can be accomplished with a number of standard off-the-shelf pole gains, or PUPI can design mounting hardware to fit your application. Custom lengths are available and predrilled mounting holes can be located to accommodate specific types of equipment. These products possess the same quality and features that make PUPI the leading brand of fiberglass crossarms.

- Light weight, yet strong 2" X 4" fiberglass profile provides a stiff and stable mounting platform
- Outstanding UV protection with thermally-bonded SunGUARD® UV resistant coating
- Holes reinforced with TorqueGUARD™ bushings
- Mounts to pole with a variety of off-the-shelf pole gains, or PUPI can design mounting hardware to fit your application
- Totally non-conductive and RF transparent
- Tested to withstand the equivalent of hurricane force wind loads
- Sealed, UV resistant endcaps
- Filled with closed-cell rigid foam to exclude moisture and contaminants
- Brown or gray color available
- Can be field-drilled
- 15/16" internal fiberglass conduit protects wires and cables

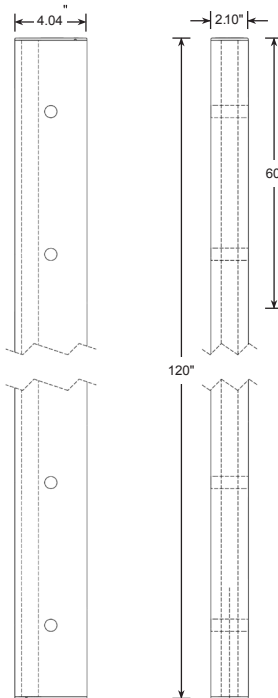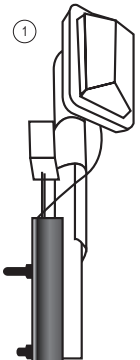

← Mean Ultimate Load  
1,270 lbs.

- Standard pole attachment holes are 11/16" diameter
- Lengths Available to 10'
- Holes drilled per customer specifications
- Weight of 10' length is 24 pounds
- Maintenance free - never needs repainting or recoating

**LENGTH IN INCHES**

**BX** **1000** **120** **XXX** **2**

**COLOR:**  
2 = GRAY  
3 = BROWN

**DRILL SPEC:**  
XXX = CUSTOM SPECIFICATION

BX = WITHOUT POLE MOUNT  
BM = WITH POLE MOUNT

<sup>1</sup>Pole top equipment and hardware not included.

PUPI is a product of:

